



Houston Office
 248 McCarty Dr.
 P.O. Box 15214
 Houston TX, 77220-5214
 (713) 672-8251
 Fax (713) 672-6336
 Email houston@clemtex.com

1-800-CLEMTEX
 www.clemtex.com

Corpus Christi Branch
 4750 Westway
 P.O. Box 5036
 Corpus Christi, TX 78465
 (361) 882-8282
 Fax (361) 882-6029
 Email corpus@clemtex.com

Dallas Branch
 4770 Gretna
 Dallas, TX 75207
 (214) 631-0584
 Fax (214) 631-5824
 Email dallas@clemtex.com



CLEMCO
 The Performance
 System

TECHNICAL DATA SHEET

Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.

Purpose

Clemco blast hose safety cables are used at all coupled connections on the blast hose. The cables support the weight of the blast hose to keep it from pulling the couplings apart or pulling the hose out of the coupling. The cables also help keep the blast hose from whipping about in the event of a coupling failure.

Safety cables should also be used with compressed-air hose connections.

Description of Operation

Attach blast hose safety cables at all coupled connections. Before connecting the couplings, pull back the spring-loaded loop. Loop the two ends of the safety cable around the hoses only — not the remote control lines.

Connect the hose coupling and slide the ends of the safety cable back until the cable is straight and the hose is slightly bent. Safety cables relieve the couplings of the weight of the hose.

Advantages


- Helps prevent death, injury, or property damage in the event of coupling failure
- Supports blast hose when run vertically or across horizontal spans
- Prolongs life of hose by keeping coupling screws from tearing outer casing
- Installs quickly without tools at all air and blast hose connections — including those between the hose and blast machine
- Prevents hose from whipping in event of coupling failure

Description

Corrosion-resistant, high-strength steel cable with spring-loaded loops at both ends. Safely controls hoses should they become disconnected at a coupling connection.

Blast Hose Safety Cables

Stock No. 15012, 15013

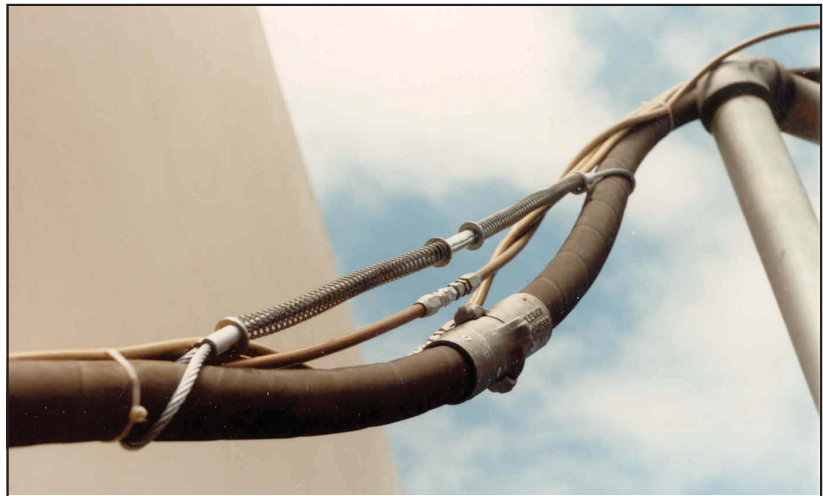

Related Clemco Literature

Description	Stock No.
Contractor Series Catalog	21385
Abrasive Blasting Safety Practices	22090
Blast Off 2	09294
Operator Safety Equipment	07764

Specifications

Description	Stock No.
Cable for 1/2" to 1 1/4" OD hose Fits Clemco 1/2" ID 2-braid hose and 3/4" ID Supa hose. (20 1/2" in length)	15012
Cable for 1 1/2" to 3" OD hose Fits all other Clemco blast hose. (38" in length)	15013

Certifications and Approvals

Meets safety standards of OSHA, Bureau of Mines, Bureau of Reclamation, and U.S. Army Corps of Engineers.

Packaging

Ships protected by clear shrink wrap

Dimensions	15012	15013
Length:	20 1/2"	38"
Weight:	.25 lb	1.1 lb

Color

Steel Gray

Authorized Distributor:

