



**Houston Office**  
248 McCarty Dr.  
P.O. Box 15214  
Houston TX, 77220-5214  
(713) 672-8251  
Fax (713) 672-6336  
Email houston@clemtex.com

**1-800-CLEMTEX**  
[www.clemtex.com](http://www.clemtex.com)

**Corpus Christi Branch**  
4750 Westway  
P.O. Box 5036  
Corpus Christi, TX 78465  
(361) 882-8282  
Fax (361) 882-6029  
Email corpus@clemtex.com

**Dallas Branch**  
4770 Gretna  
Dallas, TX 75207  
(214) 631-0584  
Fax (214) 631-5824  
Email dallas@clemtex.com



**CLEMCO**  
The Performance  
System

## TECHNICAL DATA SHEET

*Note: For safe, efficient blasting, read and follow the owner's manual and seek training for everyone who will use this equipment.*

### Purpose

Clemco Supa blast hose is standard equipment on all Contractor Series Blast Machines. Supa hose is lighter and more flexible than 2-braid or 4-ply blast hose of the same ID. It can be used with all common blast media.

Supa hose achieves its lightness and flexibility from its slightly thinner outer casing. The inner tube is made from SBR rubber.

### Description of Operation

Clemco Supa blast hose is fabricated to fit Clemco couplings and nozzle holders. The blast hose inner diameter (ID) should be 3 to 4 times the size of the nozzle orifice and the same size as the nozzle entry diameter. The hose ID should be the same size or larger than the machine piping.

For applications where heavier 2-braid or 4-ply blast are used (for their more durable outer casing) a 10 to 15 foot length of Supa hose can be connected as the last section before the nozzle. This whip hose is easier for the operator to maneuver.

### Advantages

- Inner tube wall of SBR rubber treated with static-dissipating compound
- Reinforced outer casing of cloth and rubber-impregnated fiber winding
- Casing is pin-pricked to prevent formation of air pockets between layers
- More flexible than 2-braid or 4-ply blast hose
- Lighter weight and slightly smaller OD make it a better whip hose


## Description

Super-flexible, lightweight, reinforced blast hose, rated at 175 psi working pressure.



## Blast Hose, Supa

**Stock No. 23100, 23101,  
23102, 23103, 23104, 23105,  
23106, 23643**

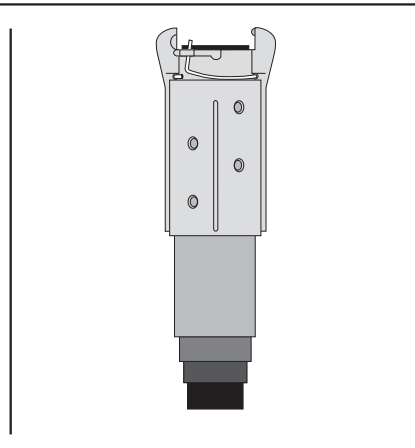

### Related Clemco Literature

Description	Stock No.
Contractor Series Catalog .....	21385
Abrasive Blasting Safety Practices .....	22090
Blast Off 2 .....	09294
Safety Cable TDS .....	21970

### Options & Accessories

#### For 3/4 inch Supa Hose

Description	Stock No.
NHP-3/4 nylon nozzle holder, contractor thread .....	11398
CQPS-3/4 nylon coupling .....	11395
Blast hose safety cable .....	15012

#### For 1-inch Supa Hose

NHP-1 nylon nozzle holder, contractor thread .....	04106
CQPS-1 nylon coupling .....	21088
Blast hose safety cable .....	15013

#### For 1-1/4 inch Supa Hose

NHP-2 nylon nozzle holder, contractor thread .....	04127
CQPS-2 nylon coupling .....	08413
Blast hose safety cable .....	15013

Description	Stock No.
3/4" ID x 1-5/16" OD* per foot	23100
3/4" ID x 1-5/16" OD* x 25'	23101
3/4" ID x 1-5/16" OD* x 50'	23102
1" ID x 1-1/2" OD* x 25'	23103
1" ID x 1-1/2" OD* x 50'	23104

1-1/4" ID x 1-7/8" OD* x 25'	23105
1-1/4" ID x 1-7/8" OD* x 50'	23106
1-1/4" ID x 1-7/8" OD* x 100'	23643

\*OD spec is held for 6 inches from each end.

Color - Brown

Ships coiled and shrink wrapped.

Weight	Shipping Dimensions	Stock No.
11 lb	24" Dia. x 3"	23101
23 lb	24" Dia. x 4"	23102
14 lb	25" Dia. x 4"	23103
26 lb	31" Dia. x 4"	23104
17 lb	25" Dia. x 4"	23105
36 lb	31" Dia. x 4"	23106
76 lb	32" Dia. x 8"	23643

Authorized Distributor:



*ISO 9001:2000 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.*